




Specifications

SMART Board® MX265 interactive display with iQ

Model SBID-MX265

Overview

Digital whiteboard. Web browser. Screen sharing. Our newest SMART Board® MX series has all the essentials educators need for bringing the devices students love into any learning environment. MX series is a great value for schools that need an interactive display on a budget. Available in 65", 75" and 86" sizes—all in 4K Ultra HD resolution—with SMART Learning Suite included, and a standard three-year warranty.






SMART Notebook® lessons, SMART lab™ activities and SMART amp® software workspaces. You can also access collaboration tools, including a digital whiteboard, built-in web browser and wireless screen sharing (iOS and Android™ mobile devices and a wide variety of computers).

Dimensions and weights¹

Dimensions

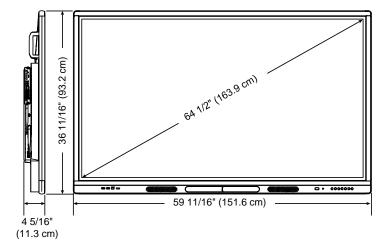

Weight

93 lb. (42 kg)

Active touch area

57 3/8" × 32 3/4" (145.7 cm × 83.3 cm)

Active image area

 $56 \frac{1}{4}$ " × $31 \frac{5}{8}$ " (142.9 cm × 80.4 cm)

Shipping dimensions (including pallet)

66 3/8" W × 45 3/4" H × 10 1/4" D (168.5 cm × 116.2 cm× 26 cm)

Shipping weight

137 lb. (62 kg)

 $^{^{1}}$ All dimensions \pm 1/8" (0.3 cm). All weights \pm 2 lb. (0.9 kg).

Hardware

Interaction

Touch technology	IR
Multitouch capabilities	Up to 10 simultaneous touch, writing or erase points ²
Object awareness	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger or palm.
Display	
Туре	LED backlit
Aspect ratio	16:9
Resolution	4K UHD
Positioning accuracy	<2 mm
Horizontal frequency (minimum)	31 Hz
Horizontal frequency (maximum)	140 kHz
Vertical frequency (minimum)	59 Hz
Vertical frequency (maximum)	70 Hz
Contrast ratio (typical)	1200:1
Brightness (maximum)	≥350 cd/m²
Refresh frequency	60 Hz
Pixel clock (maximum)	600 MHz
Pixel dimensions	0.37 mm
Viewing angle	178°
Response time (typical)	8 ms
Ambient light sensor	Yes
Audio	10 W integrated speakers (×2)

 $^{{}^2\}text{Requires SMART Product Drivers to be installed. Some applications might not support all touch points.}$

Included cables and

iQ appliance

accessories Country-specific power cable

16' 5" (5 m) USB cable Wall mount bracket kit

Pen (×2) Antennas (×2) IR remote control

iQ appliance

Wireless technology Bluetooth® dual mode (backwards compatible with Bluetooth 2.1 + EDR)

Capture options Establish a Bluetooth wireless connection with a supported mobile device (see below) by

scanning the interactive display's unique QR code

Supported languages French

German Italian Japanese Korean Norwegian Simplified Chinese

Spanish Swedish

Traditional Chinese

Mounting holes

For a standard VESA® 500 mm × 400 mm mounting plate with M6 screws

⋒ NOTE

A wall mount is included with the display.

Mounting bracket depth

Minimum clearance depth of 11/4" (3 cm) for all components on the back of the interactive display for airflow

Connectors

Back Connector panel:

HDMI® in (with HDCP 2.2 support) (×2)

VGA in RJ45 (×2)

USB Type-B (for touch applications) (×1)

USB 2.0 Type-A (×2)

HDMI 1.4 out (HDCP-compliant)³⁴

S/PDIF out (optical)

Stereo 3.5 mm in (for VGA in)

Stereo 3.5 mm out

OPS slot RS-232 control iQ appliance (AM40): USB 3.0 Type-A (×2)

HDMI 1.4 (HDCP-compliant)

 $^{^3}$ HDCP is always enabled. Content is shown in 480p resolution if the external display doesn't support HDCP.

 $^{^4}$ HDMI out is an optional feature. Contact your authorized SMART reseller (smarttech.com/where) for further ordering instructions.

SMART BOARD MX265 INTERACTIVE DISPLAY WITH IQ - MODEL SBID-MX265

Front HDMI in (with HDCP 1.4 support)

USB Type-B (for touch applications)

USB Type-A (×2)

Applications

Interactive display Apps included in the iQ appliance

One-year subscription to SMART Learning Suite

Installation requirements

Interactive display See the SMART Board MX series interactive displays installation and maintenance guide

(smarttech.com/kb/171257)

SMART Notebook® Player mobile app iOS 10 or later operating system software

SMART kapp® app

Apple devices iOS 9 or later operating system software

50 MB of storage iPhone 4S or later

Third-generation iPad or later First-generation iPad mini or later Fifth-generation iPod touch or later

Android devices Android 4.4.4 (KitKat) or later operating system

50 MB of storage (internal or SD card)

1024 MB of RAM

720p or better screen resolution

Bluetooth 2.1 + EDR

3 megapixel or better rear-facing camera (recommended)

SMART kapp viewer

Mobile Safari for iOS 9 or later operating system software

Chrome[™] for Android 39.0.2171.93 or later

Desktop Internet Explorer® 10 or later

Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later

Room computers and guest laptops

General requirements See the SMART Notebook software release notes

4K UHD Graphics card that supports 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory

See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

Mini-computers

General requirements See the SMART Notebook software release notes

Bracket Optional bracket available

Cable requirements

HDMI Maximum length: 23' (7 m)

▶ NOTES

- Use only certified HDMI cables that have been tested to support the performance standard you require
- The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality

USB Maximum length: 16' (5 m)

Important

Using cables that are longer than these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to *SMART installation standards* (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Interactive flat panel and iQ appliance power consumption at 77°F (25°C)

Standby mode ≤0.3 W

Maximum operating 115 W

Standalone interactive display power consumption at 77°F (25°C)

Standby mode ≤0.3 W

Normal operating

(out-of-box)

100 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4-140°F (-20-60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification

UL (U.S./Canada), FCC, IC, CE, EAC, RCM, NRCS, SABS, CITC, TRA

(Model ID: IDX65-1)

Environmental compliance

European Union REACH, RoHS, Battery, WEEE and Packaging

U.S. CONEG Packaging, California Proposition 65 and Conflict Minerals

SMART BOARD MX265 INTERACTIVE DISPLAY WITH IQ - MODEL SBID-MX265

Purchasing information

Order number

SBID-MX265 SMART Board MX065 interactive display with iQ and SMART Learning Suite

Optional accessories

Other See smarttech.com/accessories

Warranty

North America and rest Three-year limited equipment warranty

of world (except UK)

UK Five-year limited equipment warranty

Extended warranty

EWY1-SBID-MX265 SBID-MX265 interactive display with iQ one-year warranty extension

EWY2-SBID-MX265 SBID-MX265 interactive display with iQ two-year warranty extension

smarttech.com/support smarttech.com/contactsupport

^{© 2018} SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, SMART lab, SMART amp, SMART response 2, Object Awareness, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. iPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 05-2018.